
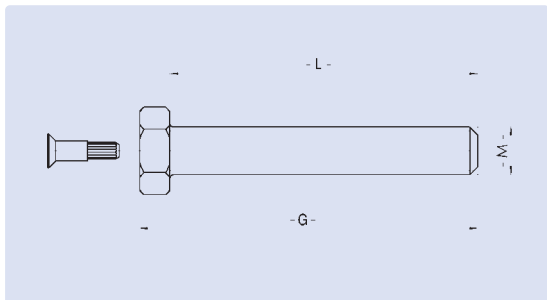


Cañas Roscadas para Pies ECO

Acero / Acero Inoxidable



Descripción Caña roscada para pies niveladores ECO

Material Acero Cincado / Acero Inoxidable

Unión del Remache Movimiento giratorio $\pm 4^\circ$

Caña Roscada M x L	Largo Total [mm]	Llave Boca [mm]	Peso [g]	Acero Cincado	Acero Inoxidable
M 6 x 25	G= 28,0	10	10,0	FCEA-6.25	FCES-6.25
M 6 x 40	G= 43,0	10	15,0	FCEA-6.40	FCES-6.40
M 8 x 25	G= 29,5	13	12,0	FCEA-8.25	FCES-8.25
M 8 x 40	G= 44,5	13	17,0	FCEA-8.40	FCES-8.40
M 8 x 50	G= 54,5	13	20,0	FCEA-8.50	FCES-8.50
M 8 x 70	G= 74,5	13	26,0	FCEA-8.70	FCES-8.70
M 8 x 80	G= 84,5	13	29,0	FCEA-8.80	FCES-8.80
M 8 x 100	G= 104,5	13	35,0	FCEA-8.100	FCES-8.100
M 8 x 120	G= 124,5	13	41,0	FCEA-8.120	FCES-8.120
M 10 x 25	G= 30,0	17	22,0	FCEA-10.25	FCES-10.25
M 10 x 40	G= 45,0	17	30,0	FCEA-10.40	FCES-10.40
M 10 x 50	G= 55,0	17	35,0	FCEA-10.50	FCES-10.50
M 10 x 70	G= 75,0	17	44,0	FCEA-10.70	FCES-10.70
M 10 x 80	G= 85,0	17	49,0	FCEA-10.80	FCES-10.80
M 10 x 100	G= 105,0	17	58,0	FCEA-10.100	FCES-10.100
M 10 x 120	G= 125,0	17	69,0	FCEA-10.120	FCES-10.120
M 12 x 25	G= 31,0	19	34,0	FCEA-12.25	FCES-12.25
M 12 x 40	G= 46,0	19	43,5	FCEA-12.40	FCES-12.40
M 12 x 50	G= 56,0	19	51,0	FCEA-12.50	FCES-12.50
M 12 x 70	G= 76,0	19	65,0	FCEA-12.70	FCES-12.70
M 12 x 80	G= 86,0	19	72,0	FCEA-12.80	FCES-12.80
M 12 x 100	G= 106,0	19	86,0	FCEA-12.100	FCES-12.100
M 12 x 120	G= 126,0	19	100,0	FCEA-12.120	FCES-12.120
M 16 x 66	G= 74,5	24	125,0	FCEA-16.66	FCES-16.66
M 16 x 100	G= 108,5	24	165,0	FCEA-16.100	FCES-16.100

Otras medidas bajo consulta