




## UNC / UNF

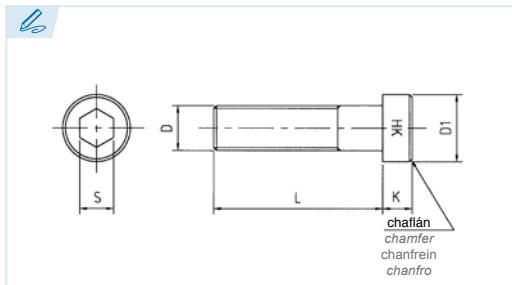

D	#8 UNC	#10 UNC	#10 (UNF)	1/4" UNC	5/16" UNC	3/8" UNC	1/2" UNC
D1 max.	0.270	0.312	0.312	0.375	0.437	0.562	0.750
K	0.085	0.098	0.098	0.127	0.158	0.192	0.254
S	5/64	3/32	3/32	1/8	5/32	3/16	1/4
Hilos/ "	32	24	32	20	18	16	13
L1	Consultar página 579 · Visit the page 579 · Consulter pages 579 · Consultar a página 579						
N.m.	2.1	3.4	3.4	8.5	16.9	31.1	67.8
L	3/8	3/8	3/8	3/8	1/2	1/2	1"
	1/2	1/2	1/2	1/2	3/4	3/4	1" 1/4
	3/4	3/4	5/8	5/8	1"	1"	1" 1/2
	1"		3/4	3/4	1" 1/4	1" 1/4	
			1"	1" 1/2	1" 1/2		

(ES) (EN) (FR) (PT)

Hilos/''  
Threads per inch  
Filets/''  
Fios/''

N.m.  
Par de apriete recomendado  
Recommended tightening torque  
Couple de serrage recommandé  
Binário de aperto recomendado

Cantidad en caja  
Box qty.  
Boitage  
Quantidade na caixa

x50  
x100

Resistencia a la tracción 1171 N/mm<sup>2</sup> min.

Tensile strength  
Résistance à la rupture  
Resistência à tração

Dureza ≤1/2 39 HRC min.  
Hardness >1/2 37 HRC min.  
Dureté Dureza

Temperaturas de uso -29° a +204°C

Working temperatures  
Températures d'emploi  
Temperaturas de utilização

Alargamiento mínimo a la ruptura 8%  
Minimum elongation at fracture  
Allongement minimum à la rupture  
Elongação mínima à rutura

Ref: ?

ejemplo  
example  
exemple  
exemplo

Ref.UNC= HCRNC-XX/XX-X XXX/XX  
Ref.UNF= HCRNF-XX/XX-X XXX/XX

D L

HCRNC (UNC)  
1/4" x 1" 1/4

Ref. = HCRNC-1-4-1-1-4

\* Los tornillos por encima de la línea azul están totalmente roscados, por debajo de la línea disponen de rosca parcial según L1.

\* According to L1, fasteners above the blue line are completely threaded while those below are partially threaded.

\* Les vis au dessus de la ligne bleue sont entièrement filetées et en dessous de la ligne bleue partiellement filetées suivant L1.

\* Os parafusos acima da linha azul estão totalmente roscados, abaixo da linha dispõem de rosca parcial conforme L1.

