


TORNILLOS EN 'T'

Tensor completo para ranura en 'T' N° 6050

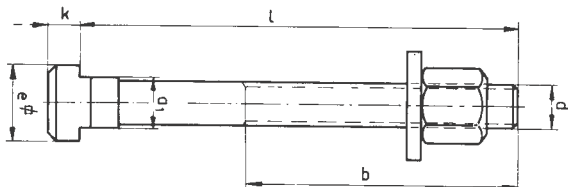

Conjunto compuesto de:
 1 u. DIN 787 Tornillo en 'T'
 1 u. DIN 6340 Arandela
 1 u. DIN 6330-B Tuerca hex. alta

Referencia	d		l	b	e	k	a1	Gram.
6050-66.25	M6	6	25	15	10	4	5,7	19
6050-66.40			40	28				22
6050-66.63			63	40				28
6050-88.32	M8	8	32	22	13	6	7,7	40
6050-88.50			50	35				45
6050-88.80			80	50				55
6050-1010.40	M10	10	40	30	15	6	9,7	65
6050-1010.63			63	45				80
6050-1010.100			100	60				110
6050-1212.50	M12	12	50	35	18	7	11,7	120
6050-1212.63			63	40				128
6050-1212.80			80	55				130
6050-1212.125		125	75	170				
6050-1212.200		200	120	220				
6050-1214.50		14	14	50	35	22	8	13,7
6050-1214.63	63			45	145			
6050-1214.80	80			55	155			
6050-1214.125	125		75	180				
6050-1214.200	200		120	240				
6050-1416.63	M14		14	63	45	25	9	15,7
6050-1416.100		100		65	230			
6050-1416.160		160		100	310			
6050-1416.250	M16	16	250	150	28	10	17,7	390
6050-1616.63			63	45				250
6050-1616.80			80	55				275
6050-1616.100		100	65	290				
6050-1616.160		160	100	420				
6050-1616.200		200	125	435				
6050-1616.250	18	18	250	150	28	10	17,7	530
6050-1618.63			63	45				260
6050-1618.80			80	55				305
6050-1618.100		100	65	315				
6050-1618.160		160	100	390				
6050-1618.200		200	125	448				
6050-1618.250	M20	20	250	150	32	12	19,7	560
6050-2020.80			80	55				520
6050-2020.100			100	65				570
6050-2020.125			125	85				560

Referencia	d		l	b	e	k	a1	Gram.
6050-2020.160	M20	20	160	110	32	12	19,7	680
6050-2020.200			200	125				780
6050-2020.250			250	150				900
6050-2020.315			315	190				1030
6050-2022.80	M22	22	80	55	35	14	21,7	530
6050-2022.100			100	65				610
6050-2022.125			125	85				670
6050-2022.160			160	110				710
6050-2022.200			200	125				770
6050-2022.250			250	150				890
6050-2022.315	M24	24	315	190	40	16	23,7	1020
6050-2424.100			100	70				910
6050-2424.125			125	85				1005
6050-2424.160			160	110				1040
6050-2424.200			200	125				1265
6050-2424.250			250	150				1410
6050-2424.315	M24	24	315	190	44	18	27,7	1640
6050-2424.400			400	240				1780
6050-2428.100			100	70				980
6050-2428.125			125	85				1010
6050-2428.160			160	110				1150
6050-2428.200			200	125				1240
6050-2428.250	M30	28	250	150	54	22	35,6	1500
6050-2428.315			315	190				1730
6050-2428.400			400	240				1860
6050-3036.125			125	80				1860
6050-3036.160			160	110				1950
6050-3036.200			200	135				2230
6050-3036.250	M36	36	250	150	65	26	41,6	2555
6050-3036.315			315	200				2950
6050-3036.500			500	300				3950
6050-3642.160			160	100				3220
6050-3642.250			250	175				3840
6050-3642.400			400	250				4950
6050-3642.600	M42	42	600	340	75	30	47,6	6500
6050-4248.160			160	100				6000
6050-4248.250			250	175				6900
6050-4248.400			400	250				8400

Otras medidas disponibles bajo consulta.