


ALTA RESISTENCIA / HIGH TENSILE

CALIDAD > 8 / CLASS > 8

PATENTE REGISTRADA
PATENTS FILED

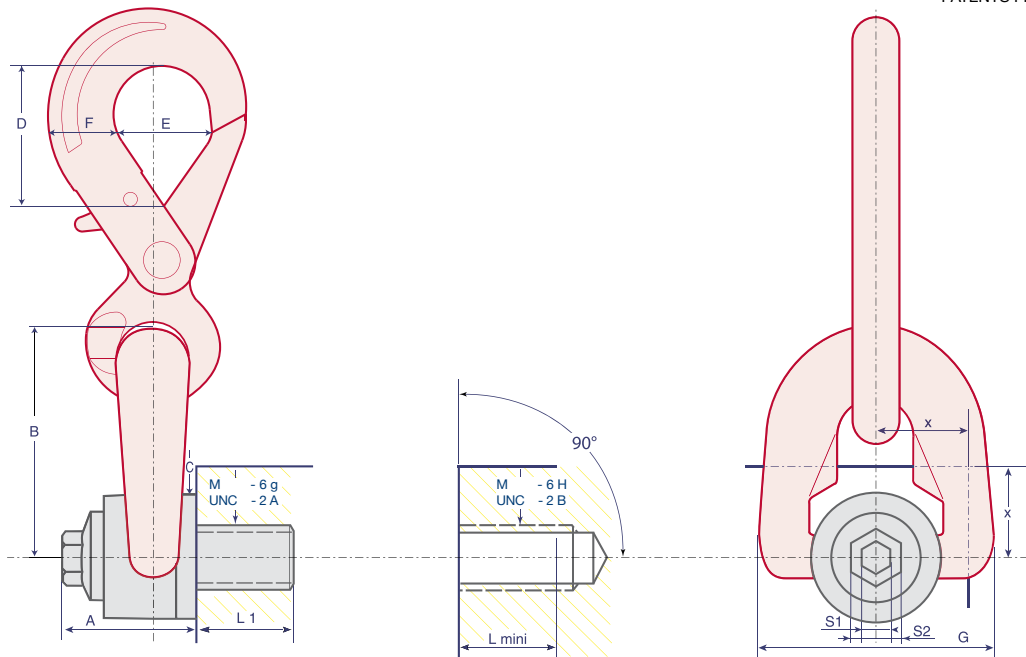

1,000 LBS = 0,4536 T

| Referencia Reference | CMU WLL | Coef. Seguridad Safety Factor | Diámetro Diameter | Ø | P | Standard L1 | N.m. Foot. LBS | X | S1 | S2 | A | B | C | D | E | F | G | Peso Weight |
|-------------------------|------------|----------------------------------|----------------------|---|---|----------------|-------------------|----|-------|------|----|----|----|----|----|----|----|----------------|
| CDSH-8 | 0,3 T | 5 | M8 (x1,25) | | | 14 | 6 | 18 | 8 | 16 | 33 | 56 | 30 | 44 | 32 | 23 | 58 | 0,8 Kg |
| CDSH-10 | 0,6 T | 5 | M10 (x1,50) | | | 17 | 10 | 18 | 8 | 16 | 33 | 56 | 30 | 44 | 32 | 23 | 58 | 0,8 Kg |
| CDSH-12 | 1 T | 5 | M12 (x1,75) | | | 21 | 15 | 18 | 8 | 16 | 33 | 56 | 30 | 44 | 32 | 23 | 58 | 0,8 Kg |
| CDSH-14* | 1,3 T | 5 | M14 (x2) | | | 23 | 30 | 24 | 8 | 20 | 45 | 76 | 45 | 58 | 46 | 29 | 79 | 1,9 Kg |
| CDSH-16 | 1,6 T | 5 | M16 (x2) | | | 27 | 50 | 24 | 8 | 20 | 45 | 76 | 45 | 58 | 46 | 29 | 79 | 2 Kg |
| CDSH-18* | 2 T | 5 | M18 (x2,5) | | | 27 | 70 | 28 | 8 | 20 | 45 | 76 | 45 | 58 | 46 | 29 | 79 | 2 Kg |
| CDSH-20 | 2,5 T | 5 | M20 (x2,5) | | | 30 | 100 | 28 | 8 | 20 | 45 | 81 | 45 | 58 | 46 | 29 | 79 | 2 Kg |
| CDSHNC-5-16 | 650 LBS | 5 | UNC 5/16"-18 | | | 15 | 7 FL | 18 | 5/16" | 5/8" | 33 | 56 | 30 | 44 | 32 | 23 | 58 | 0,8 Kg |
| CDSHNC-3-8 | 1,200 LBS | 5 | UNC 3/8"-16 | | | 17 | 8 FL | 18 | 5/16" | 5/8" | 33 | 56 | 30 | 44 | 32 | 23 | 58 | 0,8 Kg |
| CDSHNC-1-2 | 2,200 LBS | 5 | UNC 1/2"-13 | | | 21 | 12 FL | 18 | 5/16" | 5/8" | 33 | 56 | 30 | 44 | 32 | 23 | 58 | 0,8 Kg |
| CDSHNC-5-8 | 3,800 LBS | 5 | UNC 5/8"-11 | | | 27 | 40 FL | 24 | 5/16" | 20 | 45 | 75 | 45 | 58 | 46 | 29 | 79 | 1,9 Kg |
| CDSHNC-3-4 | 5,500 LBS | 5 | UNC 3/4"-10 | | | 30 | 80 FL | 24 | 5/16" | 20 | 45 | 75 | 45 | 58 | 46 | 29 | 79 | 2 Kg |

* no estándar / non-standard

CMU = Carga Máxima de Utilización / WLL = Working Load Limit

T = Tonelada / Tone

Otras variantes del eje de fijación bajo solicitud / Other variants of the fixing axis available upon request