


ALTA RESISTENCIA / HIGH TENSILE

CALIDAD > 8 / CLASS > 8



PATENTE REGISTRADA  
PATENTS FILED

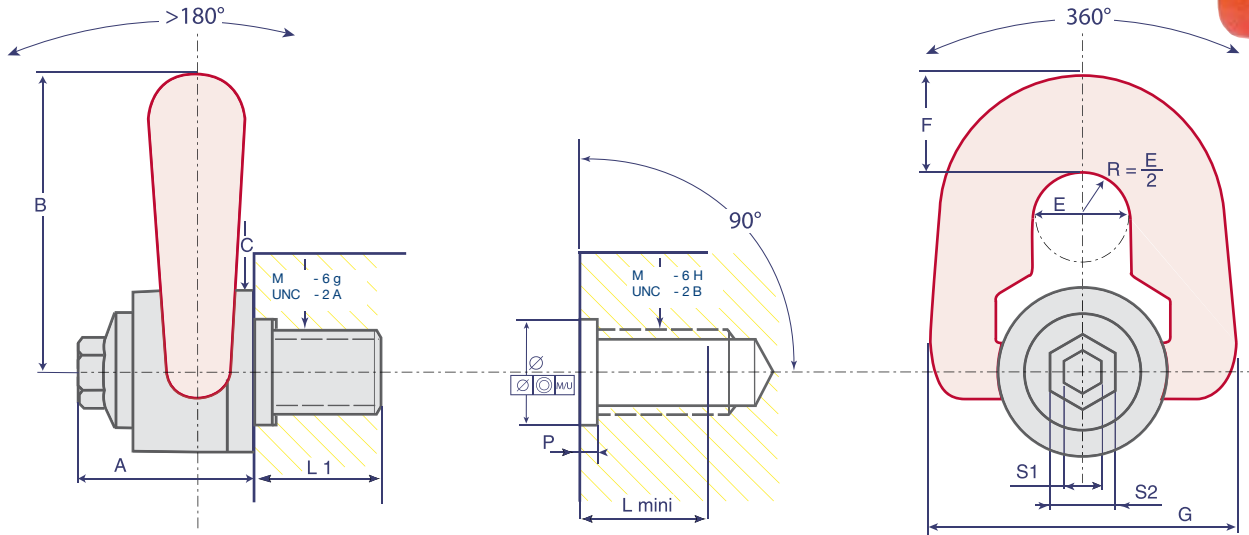

1,000 LBS = 0,4536 T

Referencia Reference	CMU WLL	Coef. Seguridad Safety Factor	Diámetro Diameter	Ø	P	Standard L1	N.m. Foot. LBS	S1	S2	A	B	C	E	F	G	Peso Weight
CDSPC-8	0,3 T	5	M8 (x1,25)	16 <sup>+0,25</sup> <sub>0</sub>	3 <sup>+1</sup> <sub>+0,5</sub>	14	6	8	16	33	56	30	19	19	58	0,3 Kg
CDSPC-10	0,6 T	5	M10 (x1,50)	20 <sup>+0,25</sup> <sub>0</sub>	3 <sup>+1</sup> <sub>+0,5</sub>	17	10	8	16	33	56	30	19	19	58	0,3 Kg
CDSPC-12	1 T	5	M12 (x1,75)	20 <sup>+0,25</sup> <sub>0</sub>	3 <sup>+1</sup> <sub>+0,5</sub>	21	15	8	16	33	56	30	19	19	58	0,3 Kg
CDSPC-14*	1,3 T	5	M14 (x2)	20 <sup>+0,25</sup> <sub>0</sub>	3 <sup>+1</sup> <sub>+0,5</sub>	23	30	8	20	45	76	45	25	27	79	0,9 Kg
CDSPC-16	1,6 T	5	M16 (x2)	20 <sup>+0,25</sup> <sub>0</sub>	3 <sup>+1</sup> <sub>+0,5</sub>	27	50	8	20	45	76	45	25	27	79	0,9 Kg
CDSPC-18*	2 T	5	M18 (x2,5)	30 <sup>+0,30</sup> <sub>0</sub>	3 <sup>+1</sup> <sub>+0,5</sub>	27	70	8	20	45	76	45	25	27	79	1 Kg
CDSPC-20	2,5 T	5	M20 (x2,5)	30 <sup>+0,30</sup> <sub>0</sub>	3 <sup>+1</sup> <sub>+0,5</sub>	30	100	8	20	45	81	45	25	27	79	1 Kg
CDSPCNC-5-16	650 LBS	5	UNC 5/16"-18	20 <sup>+0,25</sup> <sub>0</sub>	3 <sup>+1</sup> <sub>+0,5</sub>	15	7 F.L.	5/16"	5/8"	33	56	30	19	19	58	0,3 Kg
CDSPCNC-3-8	1,200 LBS	5	UNC 3/8"-16	20 <sup>+0,25</sup> <sub>0</sub>	3 <sup>+1</sup> <sub>+0,5</sub>	17	8 F.L.	5/16"	5/8"	33	56	30	19	19	58	0,3 Kg
CDSPCNC-1-2	2,200 LBS	5	UNC 1/2"-13	20 <sup>+0,25</sup> <sub>0</sub>	3 <sup>+1</sup> <sub>+0,5</sub>	21	12 F.L.	5/16"	5/8"	33	56	30	19	19	58	0,3 Kg
CDSPCNC-5-8	3,800 LBS	5	UNC 5/8"-11	30 <sup>+0,30</sup> <sub>0</sub>	3 <sup>+1</sup> <sub>+0,5</sub>	27	40 F.L.	5/16"	20	45	76	45	25	27	79	1 Kg
CDSPCNC-3-4	5,500 LBS	5	UNC 3/4"-10	30 <sup>+0,30</sup> <sub>0</sub>	4 <sup>+1</sup> <sub>+0,5</sub>	30	80 F.L.	5/16"	20	45	76	45	25	27	79	1 Kg

\* no estándar / non-standard

CMU = Carga Máxima de Utilización / WLL = Working Load Limit

T = Tonelada / Tone

Otras variantes del eje de fijación bajo solicitud / Other variants of the fixing axis available upon request