


ALTA RESISTENCIA / HIGH TENSILE

CALIDAD > 8 / CLASS > 8



PATENTE REGISTRADA
PATENTS FILED

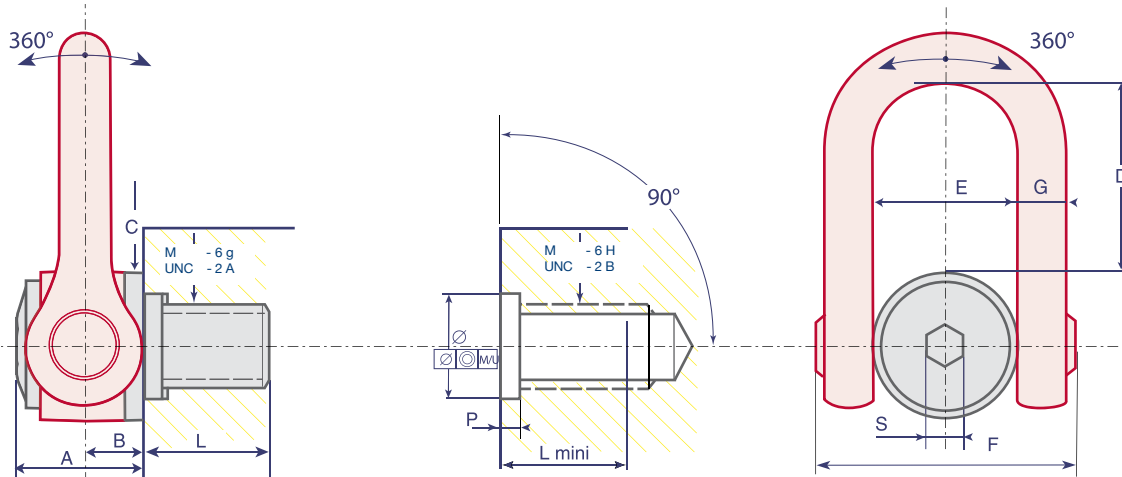

1,000 LBS = 0,4536 T

Referencia Reference	CMU WLL	Coef. Seguridad Safety Factor	Diámetro Diameter	Ø	P	Standard L	N.m. Foot. LBS	S	A	B	C	D	E	F	G	Peso Weight
CDSSC-30	8 T	5	M30 (x3,5)	36 ^{+0,30} _{+0,00}	4 ⁺¹ _{+0,5}	45	250	19	61	31	70	104	73	145	29	5,5 Kg
CDSSC-33*	8 T	5	M33 (x3,5)	48 ^{+0,30} _{+0,00}	6 ⁺¹ _{+0,5}	50	250	19	61	31	70	104	73	145	29	5,5 Kg
CDSSC-36	11 T	5	M36 (x4)	48 ^{+0,50} _{+0,10}	6 ⁺¹ _{+0,5}	54	320	19	61	31	70	104	73	145	29	5,5 Kg
CDSSC-36-300*	10 T	5	M36 (x3)	48 ^{+0,50} _{+0,10}	6 ⁺¹ _{+0,5}	54	320	19	61	31	70	104	73	145	29	5,5 Kg
CDSSC-42	13 T	5	M42 (x4,5)	48 ^{+0,50} _{+0,10}	6 ⁺¹ _{+0,5}	63	400	19	61	31	70	104	73	145	29	5,8 Kg
CDSSC-42-300*	12,5 T	5	M42 (x3)	48 ^{+0,50} _{+0,10}	6 ⁺¹ _{+0,5}	63	400	19	61	31	70	104	73	145	29	5,8 Kg
CDSSC-45*	15 T	4	M45 (x4,5)	48 ^{+0,50} _{+0,10}	8 ⁺¹ _{+0,5}	63	400	19	61	31	70	104	73	145	29	5,7 Kg
CDSSC-48	22 T	4	M48 (x5)	64 ^{+0,60} _{+0,10}	8 ⁺¹ _{+0,5}	68	600	19	79	38	90	125	91	184	33	11 Kg
CDSSC-48-300*	20 T	4	M48 (x3)	64 ^{+0,60} _{+0,10}	8 ⁺¹ _{+0,5}	68	600	19	79	38	90	125	91	184	33	11 Kg
CDSSC-48-400*	20 T	4	M48 (x4)	64 ^{+0,60} _{+0,10}	8 ⁺¹ _{+0,5}	68	600	19	79	38	90	125	91	184	33	11 Kg
CDSSC-56	26 T	4	M56 (x5,5)	64 ^{+0,60} _{+0,10}	8 ⁺¹ _{+0,5}	78	600	19	79	38	90	125	91	184	33	11,5 Kg
CDSSC-56-400*	25 T	4	M56 (x4)	64 ^{+0,60} _{+0,10}	8 ⁺¹ _{+0,5}	78	600	19	79	38	90	125	91	184	33	11,5 Kg
CDSSC-64	32,1 T	4	M64 (x6)	74 ^{+0,60} _{+0,10}	10 ⁺¹ _{+0,5}	90	600	19	79	38	95	125	91	184	33	12,2 Kg
CDSSC-64-400*	32,1 T	4	M64 (x4)	74 ^{+0,60} _{+0,10}	10 ⁺¹ _{+0,5}	90	600	19	79	38	95	125	91	184	33	12,2 Kg
CDSSCNC-1-1-4	14,000 LBS	5	UNC 1 1/4"-7	36 ^{+0,30} ₊₀	4 ⁺¹ _{+0,5}	45	200 F.L.	3/4"	61	31	70	104	73	145	29	5,4 Kg
CDSSCNC-1-3-8*	20,000 LBS	5	UNC 1 3/8"-6	48 ^{+0,50} _{+0,10}	6 ⁺¹ _{+0,5}	54	300 F.L.	3/4"	61	31	70	104	73	145	29	5,4 Kg
CDSSCNC-1-1-2	20,000 LBS	5	UNC 1 1/2"-6	48 ^{+0,50} _{+0,10}	6 ⁺¹ _{+0,5}	61	300 F.L.	3/4"	61	31	70	104	73	145	29	5,4 Kg
CDSSCNC-2	50,000 LBS	4	UNC 2"-4 1/2	64 ^{+0,50} _{+0,10}	8 ⁺¹ _{+0,5}	76	450 F.L.	3/4"	79	38	90	125	91	184	33	11,1 Kg

* no estándar / non-standard

CMU = Carga Máxima de Utilización / WLL = Working Load Limit

T = Tonelada / Tone

Otras variantes del eje de fijación bajo solicitud / Other variants of the fixing axis available upon request