


ESPECIFICACIONES TECNICAS TORNILLERIA DE ALTA RESISTENCIA HOLO-KROME®

Longitudes de rosca

Tornillos cabeza cilíndrica con hexágono interior UNC – UNF - BSW

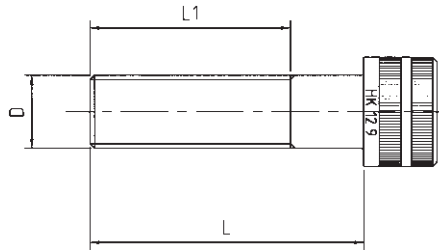

D	N°4	1/8 N°5	N°6	N°8	3/16 N°10	1/4	5/16	3/8	7/16	1/2	5/8	3/4	7/8	1			
L	L1 en " min.																
7/8																	
1	3/4	3/4								Tornillos completamente roscados por encima de las líneas.							
1 1/4	1	1	3/4	7/8	7/8												
1 1/2	3/4	3/4	1	1 1/8	1 1/8	1											
1 3/4	1	1	3/4	7/8	7/8	1 1/4	1 1/8	1 1/4									
2	3/4	3/4	1	1 1/8	1 1/8	1	1 3/8	1 1/2	1 3/8								
2 1/4	1	1	3/4	7/8	7/8	1 1/4	1 1/8	1 1/4	1 5/8						1 1/2		
2 1/2		3/4	1	1 1/8	1 1/8	1	1 3/8	1 1/2	1 3/8						1 3/4	1 3/4	
2 3/4			3/4	7/8	7/8	1 1/4	1 1/8	1 1/4	1 5/8						2	2	
3				1 1/8	1 1/8	1	1 3/8	1 1/2	1 3/8						1 1/2	2 1/4	2
3 1/4				7/8	7/8	1 1/4	1 1/8	1 1/4	1 5/8						1 3/4	1 3/4	2 1/4
3 1/2					1 1/8	1	1 3/8	1 1/2	1 3/8	2	2	2 1/2					
3 3/4					7/8	1 1/4	1 1/8	1 1/4	1 5/8	1 1/2	2 1/4	2 3/4	2 1/4	2 1/2			
4					1 1/8	1	1 3/8	1 1/2	1 3/8	1 3/4	1 3/4	2	2 1/4	2 1/2			
4 1/4						1 1/4	1 1/8	1 1/4	1 5/8	2	2	2 1/4	2 1/4	2 1/2			
4 1/2						1	1 3/8	1 1/2	1 3/8	1 1/2	2 1/4	2 1/2	2 1/2	2 1/2			
4 3/4						1 1/4	1 1/8	1 1/4	1 5/8	1 3/4	1 3/4	2 3/4	2 3/4	2 3/4			
5						1	1 3/8	1 1/2	1 3/8	2	2	2	3	3			
5 1/4							1 1/8	1 1/4	1 5/8	1 1/2	2 1/4	2 1/4	2 1/4	3 1/4			
5 1/2							1 3/8	1 1/2	1 3/8	1 3/4	1 3/4	2 1/2	2 1/2	2 1/2			
5 3/4							1 1/8	1 1/4	1 5/8	2	2	2 3/4	2 3/4	2 3/4			
6							1 3/8	1 1/2	1 3/8	1 1/2	2 1/4	2	3	3			
6 1/4							1 1/8	1 1/4	1 5/8	1 3/4	1 3/4	2 1/4	2 1/4	3 1/4			
6 1/2								1 1/2	1 3/8	2	2	2 1/2	2 1/2	2 1/2			
6 3/4								1 1/4	1 5/8	1 1/2	2 1/4	2 3/4	2 3/4	2 3/4			
7								1 1/2	1 3/8	1 3/4	1 3/4	2	3	3			
7 1/4								1 1/4	1 5/8	2	2	2 1/4	2 1/4	3 1/4			
7 1/2								1 1/2	1 3/8	1 1/2	2 1/4	2 1/2	2 1/2	2 1/2			
7 3/4									1 5/8	1 3/4	1 3/4	2 3/4	2 3/4	2 3/4			
8									1 3/8	2	2	2	3	3			