


Material: Acero rápido HSS
Dureza Vástago: 62±2 HRC
Dureza Cabeza: 52±5 HRC

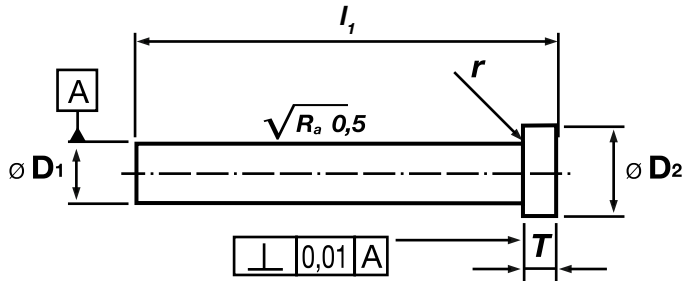

LONGITUD L=100mm

Tolerancia general: ISO 2768m

Referencia	d_1 m5	d_2 0 -0,25	l_1 +1 0	T +0,25 0	r +0,1 0
	mm	mm	mm	mm	
8020A-3-100	3 •	5	100	3	0,2
8020A-4-100	4 •	6	100	3	0,2
8020A-5-100	5	8	100	5	0,3
8020A-6-100	6	9	100	5	0,3
8020A-8-100	8	11	100	5	0,3
8020A-10-100	10	13	100	5	0,3

Referencia	d_1 m5	d_2 0 -0,25	l_1 +1 0	T +0,25 0	r +0,1 0
	mm	mm	mm	mm	
8020A-13-100	13	16	100	5	0,4
8020A-16-100	16	19	100	5	0,4
8020A-20-100	20	23	100	5	0,4
8020A-25-100	25	28	100	5	0,4
8020A-32-100	32	35	100	5	0,4

• Medidas fuera de norma DIN