



TUERCAS

Tuerca en 'T' Sin Taladro N° 508-ST

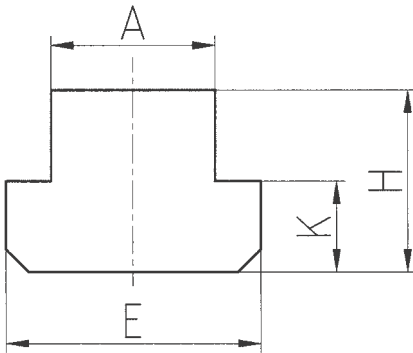

Acero bonificado. Dureza 10

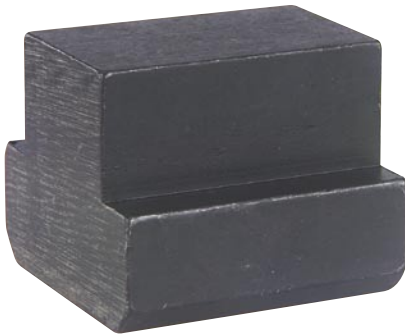

Referencia		A	E	H	K	Gram.
508ST-6	6	5,7	10	8	4	4
508ST-8	8	7,7	13	10	6	10
508ST-10	10	9,7	15	12	6	16
508ST-12	12	11,7	18	14	7	27
508ST-14	14	13,7	22	16	8	50
508ST-16	16	15,7	25	18	9	70
508ST-18	18	17,7	28	20	10	95
508ST-20	20	19,7	32	24	12	150
508ST-22	22	21,7	35	28	14	210
508ST-24	24	23,7	40	32	16	300
508ST-28	28	27,7	44	36	18	430
508ST-32	32	31,7	50	40	20	630
508ST-36	36	35,6	54	44	22	800
508ST-42	42	41,6	65	52	26	1400
508ST-48	48	47,6	75	60	30	2100
508ST-54	54	53,6	85	70	34	3150

Con ellas pueden fabricarse tuercas en 'T' con roscas especiales.