



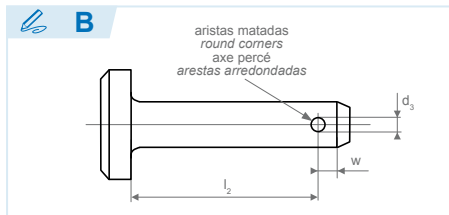

DIN 1444

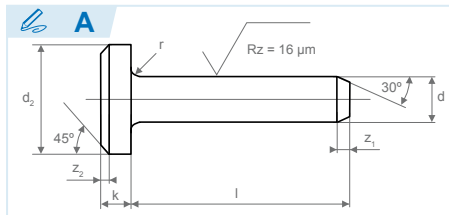

Perno con cabeza
Clevis pins with head
Boulon à clavette
Cavilha com cabeça

Material: 9SMnPb28K
Material: 9SMnPb28K
Matière: 9SMnPb28K
Material: 9SMnPb28K

Tolerancia: h11
Tolerance: h11
Tolérance: h11
Tolerância: h11

Forma A y B
Type A & B
Forme A et B
Forma A e B

d	h11	3	4	5	6	8	10	12	14	16	18	20	22	24	
d ₂	h14	5	6	8	10	14	18	20	22	25	28	30	33	36	
d ₃	H13	0,8	1	1,2	1,6	2	3,2	3,2	4	4	5	5	5	6,3	
k	js14	1	1	1,6	2	3	4	4	4	4,5	5	5	5,5	6	
r		0,6	0,6	0,6	0,6	0,6	0,6	0,6	0,6	0,6	1	1	1	1	
w		1,6	2,2	2,9	3,2	3,5	4,5	5,5	6	6	7	8	8	9	
z ₁	max	1	1	2	2	2	2	3	3	3	3	4	4	4	
z ₂	≈	0,5	0,5	1	1	1	1	1,6	1,6	1,6	1,6	2	2	2	
l	js15	06	08	10	12	16	20	25	30	35	40	40	45	50	
		08	10	12	14	• 18	• 22	• 28	35	40	45	45	50	55	
		10	12	14	16	20	25	30	40	45	50	50	55	60	
		12	14	16	• 18	• 22	• 28	35	45	50	55	55	60	65	
		14	16	• 18	20	25	30	40	50	55	60	60	65	70	
		16	• 18	20	• 22	• 28	35	45	55	60	65	65	70	75	
		• 18	20	• 22	25	30	40	50	60	65	70	70	75	80	
		20	• 22	25	• 28	35	45	55	65	70	75	75	80	85	
		• 22	25	• 28	30	40	50	60	70	75	80	80	85	90	
		25	• 28	30	35	45	55	65	75	80	85	85	90	• 95	
		• 28	30	35	40	50	60	70	80	85	90	90	• 95	100	
		30	35	40	45	55	65	75	85	90	• 95	• 95	100		
				40	45	50	60	70	80	90	• 95	100			
					50	55	65	75	85	• 95	100				
						60	70	80	90	100					
							75	85	• 95						
					80	90	100								
						• 95									
						100									



Forma · Type · Forme · Forma

- | | |
|---|---|
| A: Sin agujero de pasador de aletas. | B: Con agujero de pasador de aletas. |
| A: Cotter bolt without a hole. | B: Cotter bolt with a hole. |
| A: Sans axes percé. | B: Avec axes percé. |
| A: Sem furo de cavilha de aletas. | B: Com furo de cavilha de aletas. |

- Se recomienda evitar estas medidas.
Avoiding these dimensions is recommended.
Nous déconseillons l'utilisation de ces dimensions.
Recomenda-se evitar estas medidas.

Artículo bajo consulta sujeto a cantidades mínimas.
Item being searched is subject to a minimum order.
Produit sur demande avec quantités minimum.
Artigo disponível sob consulta, sujeito a quantidades mínimas.

Ref: ?

ejemplo
example
exemple
exemplo

Ref. = D440X-XX-XXX
A/B d l

DIN 1444 A 10x20

Ref. = D440A-10-20

w

Para medidas entre agujeros distintas, se debe especificar en la consulta y el pedido.

For dimensions between different holes, please specify this when making your request and order.

Pour des longueurs d'axes différents, le préciser au moment de la demande de prix et de la commande.

Para medidas entre furos distintas, é necessário especificar na consulta e encomenda.

27	30	33	36	40	45	50	55	60	70	80	90	100	h11	d
40	44	47	50	55	60	66	72	78	90	100	110	120	h14	d ₂
6,3	8	8	8	8	10	10	10	10	13	13	13	13	H13	d ₃
6	8	8	8	8	9	9	11	12	13	13	13	13	js14	k
1	1	1	1	1	1	1	1	1	1	1	1	1		r
9	10	10	10	10	12	12	14	14	16	16	16	16		w
4	4	4	4	4	4	4	6	6	6	6	6	6	max	z ₁
2	2	2	2	2	2	2	3	3	3	3	3	3	≈	z ₂
50	60	65	70	80	90	100	110	120	140	160	180	200	l js15	
55	65	70	75	85	• 95	• 105	• 115	• 125	150	170	190			
60	70	75	80	90	100	110	120	130	160	180	200			
65	75	80	85	• 95	• 105	• 115	• 125	140	170	190				
70	80	85	90	100	110	120	130	150	180	200				
75	85	90	• 95	• 105	• 115	• 125	140	160	190					
80	90	• 95	100	110	120	130	150	170	200					
85	• 95	100	• 105	• 115	• 125	140	160	180						
90	100	• 105	110	120	130	150	170	190						
• 95	• 105	110	• 115	• 125	140	160	180	200						
100	110	• 115	120	130	150	170	190							
• 105	• 115	120	• 125	140	160	180	200							
110	120	• 125	130	150	170	190								
• 115	• 125	130	140	160	180	200								
120	130	140	150	170	190									
• 125	140	150	160	180	200									
130	150	160	170	190										
140	160	170	180	200										
150	170	180	190											
160	180	190	200											
170	190	200												
180	200													
190														
200														