



E3211 - E3210

PATENTE REGISTRADA
PATENTS FILED

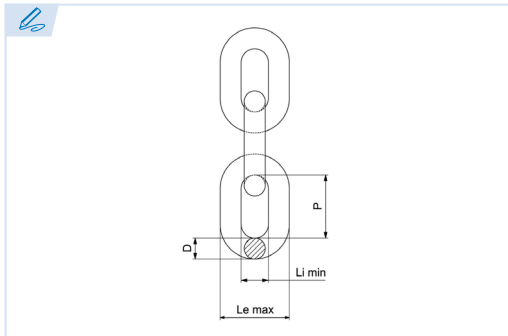

BREVETS DÉPOSÉS
PATENTE REGISTRADA



Cadena según norma en 818-2
Chain according to en 818-2
Chaîne selon en 818-2
Corrente de acordo com en 818-2

Grado 100
Grade 100
Grade 100
Grau 100

Conforme a la directiva europea 2006/42/CE
In accordance with the new european directive 2006/42/CE.
Conforme à la directive européenne machines 2006/42/CE.
Conforme a norma europeia 2006/42/CE.

(ES) (EN) (FR) (PT)

CMU Carga máxima de utilización

Working load limit
Charge maximale d'utilisation
Carga máxima de trabalho

T Tonelada

Tone
Tonne
Tonelada

Ref.	Ø Cadena		CMU	P	Li min	Le max	Kg.
	mm	inch					
E3211-6	6	1/4	1,4 T	18	8	22	0,9
E3211-7	7	9/32	1,9 T	21	9	26	1,2
E3211-8	8	5/16	2,5 T	24	10,5	29,5	1,6
E3211-10	10	3/8	4 T	30	13	37	2,5
E3211-13	13	1/2	6,7 T	39	17	48	4,2
E3211-16	16	5/8	10 T	48	21	59	6,2
E3211-20	20	3/4	16 T	60	26	74	10
E3211-22	22	7/8	19 T	66	28,5	81,5	11,9

Ref.	Ø Cadena		CMU	P	Tolerancia	Li min	Le max	f min	M.P.F.	B.F.	Kg.
	mm	inch									
E3210-26-1	26	1	26,5 T	78	± 2,3	33,8	96,2	21	664	1060	16,3
E3210-32-1	32	1 1/4	40 T	96	± 2,9	41,6	118	26	981	1570	24,3

