


E43010-E4360

PATENTE REGISTRADA
PATENTS FILED



BREVETS DÉPOSÉS
PATENTE REGISTRADA

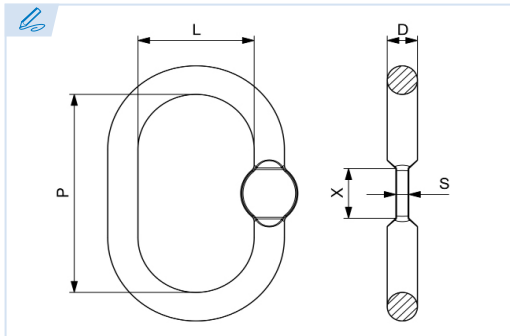

Anilla maestra oval especial
Special oblong masterlink
Maille de tête ovale spéciale
Olhal oval especial

Grado 80

Grade 80

Grade 80

Grau 80

Conforme a la directiva europea 2006/42/CE

In accordance with the new european directive 2006/42/CE.

Conforme à la directive européenne machines 2006/42/CE.

Conforme a norma europeia 2006/42/CE.

ES EN FR PT

CMU Carga máxima de utilización

Working load limit

Charge maximale d'utilisation

Carga máxima de trabalho

T Tonelada

Tone

Tonne

Tonelada

Ref. sin aplastamiento	Ref. con aplastamiento	Ø Cadena \wedge		CMU	Dimensiones EN 1677-4				Kg.
					D	P	L	SxX	
E4310-8-7	E4360-8-7	8	7"	2,7 T	14	120	70	8x25	0,44
E4310-10-8	E4360-10-8	10	8"	3,5 T	16	140	80	8x25	0,67
E4310-13-10	E4360-13-10	13	10"	5,5 T	20	160	95	11,5x35	1,2
E4310-16-13	E4360-16-13	16	13"	9,4 T	27	190	110	14x45	2,65
E4310-20-16	E4360-20-16	20	16"	14,2 T	33	230	130	18x45	4,8
E4310-22-20		22	20"	22,3 T	38	275	150		7,5
E4310-26-22		26	22"	33,5 T	45	340	180		12,8
E4310-32-26		32	26"	40,8 T	50	350	190		16,5
E4310-36-32		36	32"	56,8 T	60	400	200		27

