


E8050

PATENTE REGISTRADA
PATENTS FILED



BREVETS DÉPOSÉS
PATENTE REGISTRADA

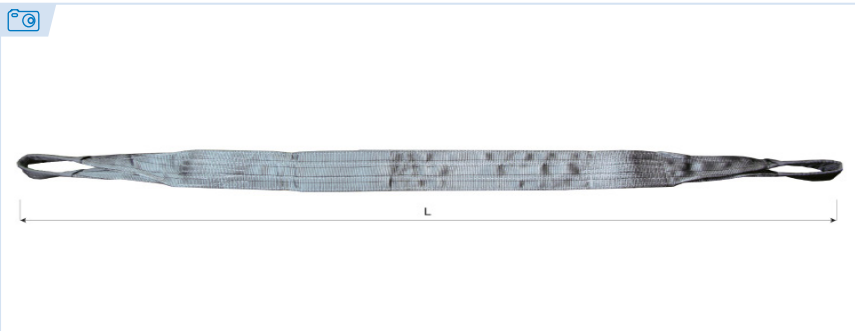

Eslinga de Elevación con Ojal de alta calidad, 4 Ton, poliéster 120mm; Gris

Polyester high quality 4 ton gray sling for lifting
Sangle de levage de grande qualité 4 ton gris en polyester

Cinta de elevação 4 ton cinzenta de alta qualidade de poliéster

Coefficiente de seguridad = 7

Safety factor = 7

Coefficient de sécurité = 7

Coefficiente de segurança = 7

Conforme la norma DIN EN 1492-1

Produced according to DIN EN 1492-1

Produites conformément à la norme DIN EN 1492-1

Fabricadas de acordo com a norma DIN EN 1492-1

Código de color según los estándares europeos

Color-Code according to European standard

Code colour en fonction des standards européens

Código de cores de acordo com as normas europeias

Conforme a la directiva europea 2006/42/CE

In accordance with the new european directive 2006/42/CE.

Conforme à la directive européenne machines 2006/42/CE.

Conforme a norma europeia 2006/42/CE.

ES EN FR PT

CMU Carga máxima de utilización

Working load limit

Charge maximale d'utilisation

Carga máxima de trabalho

T Tonelada

Tone

Tonne

Tonelada

Ref.	L mt	CMU ⌚	CMU ⌚	Anchura x espesor mm	Longitud del ojal mm	Ancho del ojal mm
E8050-4-120-1	1	4 T	8 T	120X7	425	40
E8050-4-120-1,5	1,5	4 T	8 T	120X7	425	40
E8050-4-120-2	2	4 T	8 T	120X7	425	40
E8050-4-120-2,5	2,5	4 T	8 T	120X7	425	40
E8050-4-120-3	3	4 T	8 T	120X7	425	40
E8050-4-120-4	4	4 T	8 T	120X7	425	40
E8050-4-120-5	5	4 T	8 T	120X7	425	40
E8050-4-120-6	6	4 T	8 T	120X7	425	40
E8050-4-120-8	8	4 T	8 T	120X7	425	40
E8050-4-120-10	10	4 T	8 T	120X7	425	40
E8050-4-120-12	12	4 T	8 T	120X7	425	40