




303 / 303R

INOX

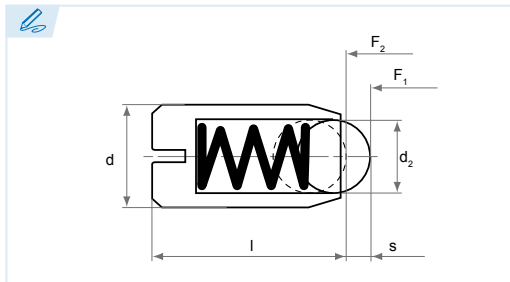

Posicionador inoxidable de bola con ranura
Stainless steel spring plunger with ball and slot
 Poussoir à bille fendu inoxydable
 Posicionador inoxidável de esfera com ranhura

Cuerpo: Acero inoxidable 1.4305

Body: Stainless steel 1.4305

Corps: Acier inoxydable 1.4305

Corpo: Aço inoxidável 1.4305

Bola: Acero Inoxidable templado 1.4034

Ball: Hardened stainless steel 1.4034

Bille: Acier inoxydable trempé 1.4034

Esfera: Aço Inoxidável temperado 1.4034

Temperatura máxima de trabajo: 250°C
 Maximum working temperature: 250°C
 Température maximum d'utilisation: 250°C
 Temperatura máxima de trabalho: 250°C

ES EN FR PT

W Muelle estándar

Standard spring

Ressort standard

Mola standard

W Muelle reforzado

Reinforced spring

Ressort renforcé

Mola reforçada

Ref.	W	d	d ₂	l	s	F ₁	N	F ₂
W303-3	W	M3	1,5	7	0,5	2,2		3
W303-4	W	M4	2,5	9	0,8	6,0		12
W303-5	W	M5	3,0	12	0,9	7,0		13
W303-6	W	M6	3,5	14	1,0	9,0		15
W303-8	W	M8	5,0	16	1,5	20,0		35
W303-10	W	M10	6,0	19	2,0	25,0		45
W303-12	W	M12	8,0	22	2,5	35,0		60
W303-16	W	M16	10,0	24	3,5	65,0		110
W303-20	W	M20	12,0	30	4,5	80,0		120
W303-24	W	M24	15,0	34	5,5	100,0		150

Ref.	W	d	d ₂	l	s	F ₁	N	F ₂
W303R-4	W	M4	2,5	9	0,8	10		20
W303R-5	W	M5	3,0	12	0,9	13		30
W303R-6	W	M6	3,5	14	1,0	24		40
W303R-8	W	M8	5,0	16	1,5	40		60
W303R-10	W	M10	6,0	19	2,0	60		90
W303R-12	W	M12	8,0	22	2,5	75		115
W303R-16	W	M16	10,0	24	3,5	115		190
W303R-20	W	M20	12,0	30	4,5	115		210
W303R-24	W	M24	15,0	34	5,5	125		240

Bajo pedido podemos suministrar posicionadores con presiones de muelle especiales.

Other spring loads upon request.

Sur demande nous pouvons vous fournir des poussoirs avec des forces spéciales.

Sob pedido, podemos fornecer posicionadores com pressões de mola especiais.