



E6890

PATENTE REGISTRADA
PATENTS FILED

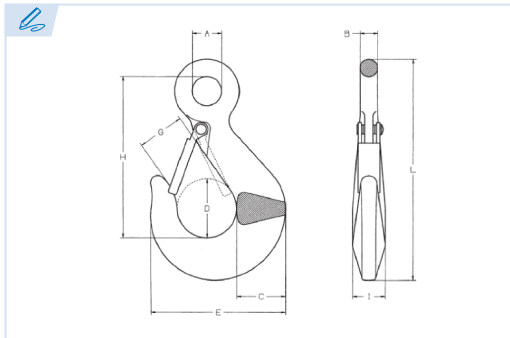

BREVETS DÉPOSÉS
PATENTE REGISTRADA



Gancho de elevación DIN 689 con pestillo
Lifting eye hook DIN 689 with latch
Lifting eye hook DIN 689 with latch
Gancho de olhal DIN 689 com patilha de segurança

Acabado galvanizado
Galvanised finish
État de surface: galvanisée
Acabamento galvanizado

Acero C15
Steel C15
Acier C15
Aço C15

Conforme a la directiva europea 2006/42/CE
In accordance with the new european directive 2006/42/CE.
Conforme à la directive européenne machines 2006/42/CE.
Conforme a norma europeia 2006/42/CE.

ES EN FR PT

CMU Carga máxima de utilización

Working load limit
Charge maximale d'utilisation
Carga máxima de trabalho

T Tonelada

Tone
Tonne
Tonelada

Ref.	CMU	A	B	C	D	E	G	H	I	L	Kg.
E6890-250	0,25 T	12	7,5	19,5	23	53,5	15	64	13	88,5	0,15
E6890-500	0,5 T	16	10	26	31	71,5	22	85	17	117,5	0,33
E6890-1000	1 T	20	13,5	36	42	98	25	116	23,5	160,5	0,83
E6890-1600	1,6 T	26	16	42,5	50	116	31	138	28	190,5	1,3
E6890-2500	2,5 T	32	20	53,5	62	145	39	174	35	240	2,5
E6890-4000	4 T	40	25	67,5	79	183,5	53	219	44,5	302	5,3
E6890-5000	5 T	46	28	75	88	204,5	69	236	49,5	329	8