


E3230-4

PATENTE REGISTRADA
PATENTS FILED



BREVETS DÉPOSÉS
PATENTE REGISTRADA

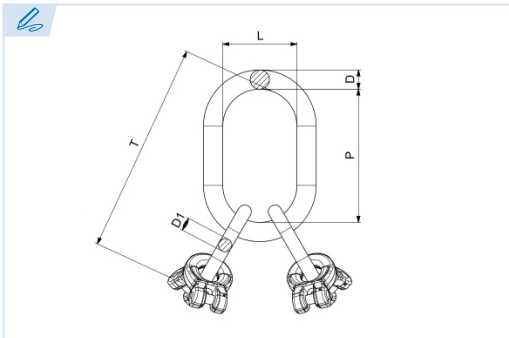

Anilla con juntura de horquilla
Master link with clevis attachment
Maille de tête avec attache à chape
Argolão com adaptador clevis

Grado 100

Grade 100

Grade 100

Grau 100

Conforme a la directiva europea 2006/42/CE
In accordance with the new european directive 2006/42/CE.
Conforme à la directive européenne machines 2006/42/CE.
Conforme a norma europeia 2006/42/CE.

ES EN FR PT

CMU Carga máxima de utilización

Working load limit
Charge maximale d'utilisation
Carga máxima de trabalho

T Tonelada

Tone
Tonne
Tonelada

| Ref. | Ø Cadena | CMU | | Dimensiones EN 1677-4 | | | | | Kg. |
|------------|----------|----------|-----------|-----------------------|-----|-----|----|-----|------|
| | | 0° - 45° | 45° - 60° | D | P | L | D1 | T | |
| E3230-4-6 | 6 | 2360 | 1700 | 18 | 135 | 75 | 13 | 219 | 1,65 |
| E3230-4-8 | 8 | 4250 | 3000 | 22 | 160 | 90 | 16 | 271 | 3,2 |
| E3230-4-10 | 10 | 6700 | 4750 | 26 | 180 | 100 | 18 | 315 | 5,3 |
| E3230-4-13 | 13 | 11200 | 8000 | 32 | 200 | 110 | 22 | 378 | 9,4 |
| E3230-4-16 | 16 | 17000 | 11800 | 36 | 260 | 140 | 26 | 477 | 16,3 |

