


## E6350

PATENTE REGISTRADA  
PATENTS FILED



BREVETS DÉPOSÉS  
PATENTE REGISTRADA

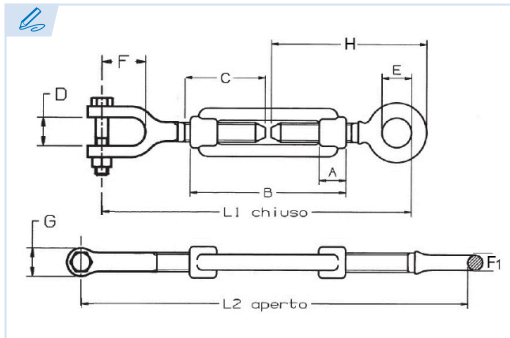

**Tensor ojo-horquilla DIN 1480**  
Turnbuckle eye-jaw DIN 1480  
Tendeur anneau-chape DIN 1480  
Esticador DIN 1480 olhal- forqueta

**Acero Fe 430 B**

Steel Fe 430 B

Acier Fe 430 B

Aço Fe 430 B

Conforme a la directiva europea 2006/42/CE

In accordance with the new european directive 2006/42/CE.

Conforme à la directive européenne machines 2006/42/CE.

Conforme a norma europeia 2006/42/CE.

ES EN FR PT

**CMU Carga máxima de utilización**

Working load limit

Charge maximale d'utilisation

Carga máxima de trabalho

**T Tonelada**

Tone

Tonne

Tonelada

Ref.	CMU	M	A	B	C	D	E	F	F1	G	H	L1	L2	Bulón	Kg.
E6350-8	0,3 T	M 8	15	110	55	12	11	25	5,5	17	78	196	274	6x35	0,18
E6350-10	0,47 T	M 10	18	125	68	13	14	28	6	20	92	217	285	8x36	0,28
E6350-12	0,69 T	M 12	21	125	69	15	17	37	8,5	24	115	236	322	10x45	0,48
E6350-14	0,94 T	M 14	22	140	91	19	18	43	9,5	30	122	275	360	12x50	0,66
E6350-16	1,29 T	M 16	27	170	91	20	22	45	11	32	144	305	420	12x50	1,21
E6350-20	2,13 T	M 20	34	200	120	25	24	48	13	40	166	354	487	16x65	1,8
E6350-22	2,63 T	M 22	36	220	120	30	29	55	16	45	175	400	530	20x78	2,69
E6350-24	3,06 T	M 24	39	255	130	31	29	66	16,5	52	211	460	615	22x87	3,21